GPU A+ Server AS -8125GS-TNMR2

DP AMD 8U System with AMD Instinct™ MI300X 8-GPU

More details here

Key Applications

High Performance Computing, AI/Deep Learning Training, Industrial Automation, Climate and Weather Modeling,




Key Features

- 8x NIC for GPU direct RDMA (1:1 GPU Ratio)
  High density 8U system with AMD Instinct MI300X 8-GPU;
- Supports up to 24 DIMMs Slots; 6000 MT/s 6TB DDR5 memory
  (Please check System Memory Section for detail);
- 8x PCIe 5.0 x16 LP + up to 4 PCIe 5.0 X16 FHFL slots;
- Flexible networking options;
- Total of 2 Hot-swap 2.5" SATA drive bays
  Single M.2 NVMe for boot drive only
  Up to 16 hot-swap 2.5" NVMe drive bays (12 default + 4 optional);
- 10 heavy duty fans with optimal fan speed control;
- Total of 6x (3+3) 3000W Redundant Titanium Level Power Supplies
  (Power supply full redundancy based on configuration and application load);

Form Factor	8U Rackmount Enclosure: 437 x 355.6 x 843.28mm (17.2" x 14" x 33.2") Package: 698 x 750 x 1300mm (27.5" x 29.5" x 51.2")
Processor	Dual processor(s) AMD EPYC™ 9004/9005 Series Processors (* AMD EPYC™ 9005 Series drop-in support requires board revision 2.x)
GPU	Max GPU Count: 8 onboard GPUs Supported GPU: AMD: Instinct™ MI300X Accelerators CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: AMD Infinity Fabric™ Link
System Memory	Slot Count: 24 DIMM slots Max Memory (1DPC): Up to 6TB 4800MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor) Max Memory (1DPC): Up to 6TB 6000MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor)
Drive Bays Configuration	Default: Total 18 bays • 12 front hot-swap 2.5" NVMe drive bays • 2 front hot-swap 2.5" SATA drive bays • 4 front hot-swap 2.5" NVMe* drive bays (*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 NVMe slots (M-key)
Expansion Slots	Default • 8 PCIe 5.0 x16 LP slots • 2 PCIe 5.0 x16 FHFL slots Option A • 8 PCIe 5.0 x16 LP slots • 4 PCIe 5.0 x16 FHFL slots
Input / Output	1 VGA port


©2026 Copyright Super Micro Computer, Inc. All rights reserved. *Product specifications may change without notice

(Front View – System)

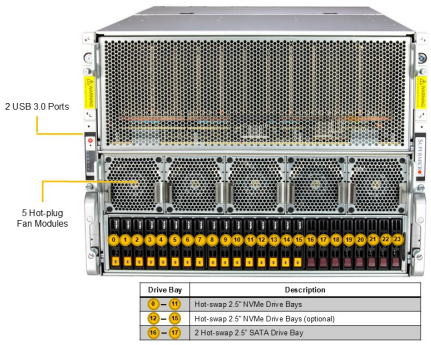

Drive Bay	Description
0 – 11	Hot-swap 2.5" NVMe Drive Bays
12 – 15	Hot-swap 2.5" NVMe Drive Bays (optional)
16 – 17	2 Hot-swap 2.5" SATA Drive Bay

(Rear View – System)

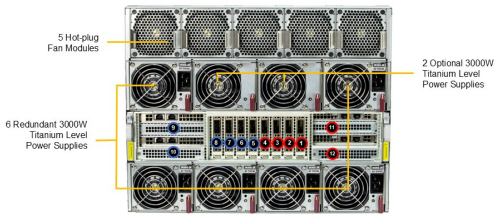

Slot	Description
1 – 8	PCIe 5.0 x16 (LP) from PLX switch linked to GPUs
9 – 10	PCIe 5.0 x16 (FHHL) via PLX switch
11 – 12	PCIe 5.0 x16 (FHHL) via PLX switch (optional)

CPU1 CPU2

System Cooling	Fans: N/A
Power Supply	6x 3000W Redundant (3 + 3) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 7 +1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 225 lbs (102.1 kg) Net Weight: 166 lbs (75.3 kg) Available Color: Black front & silver body
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	**Super H13DSG-OM**
Chassis	**CSE-GP801TS**

©2026 Copyright Super Micro Computer, Inc. All rights reserved. *Product specifications may change without notice